


HVC-D07

安装尺寸/Mounting Dimension

HVC-D07

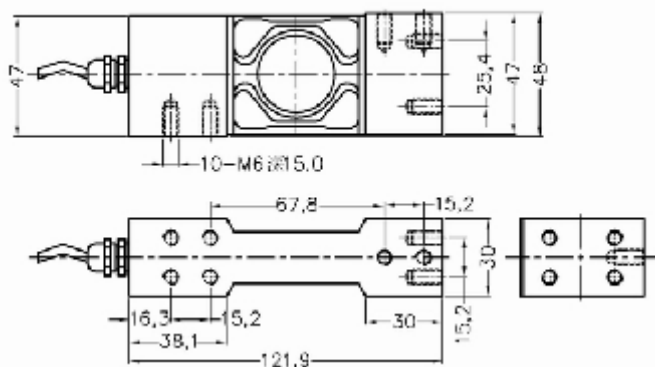


特点与用途/Features & Applications

- l 合金钢材料
- l 精度高、抗偏载能力强
- l 容易安装，IP65
- l 适用于电子秤、计数秤、电子天平及工业称重系统
- l **Made of Alloy Steel.**
- l **High accuracy, high side load tolerance**
- l **Easy to install, IP65 protection**
- l **Mainly used for electronic scales, electronic balance, price computing scales and industrial weighing systems**

参数	Specifications	技术指标/Technique
额定容量	Capacity	20,50kg
精度等级	Accuracy class	C3
输出灵敏度	Rated output	2.0±10% mV/V
零点输出	Zero balance	±0.2%F.S.
非线性	Non-linearity	0.03%F.S.
滞后	Hysteresis	0.03%F.S.
重复性	Repeatability	0.03%F.S.
蠕变 (30min)	Creep(30min)	0.03%F.S.
温度灵敏度漂移	Temp.effect on output	0.02%F.S./10℃
零点温度漂移	Temp.effect on zero	0.02%F.S./10℃
输入电阻	Input impedance	1106±10Ω
输出电阻	Output impedance	960±50Ω
绝缘电阻	Insulation	≥5000MΩ/100VDC
激励电压	Recommended excitation	5~10V
最大激励电压	Maximum excitation	15V
温度补偿范围	Compensated temp range	-10~40℃
工作温度范围	Operation temp range	-20~60℃
安全超载	Safe overload	200%F.S.
极限超载	Ultimate overload	300%F.S.
电缆线尺寸	Cable size	Φ6×3000mm
单件重量	Weight approx.	0.5kg
材料	Material	Alloy Steel(合金钢)
防护等级	IP Class	IP65
最大秤盘尺寸	Max.platform size	400mm×400mm

受力方式/Load Direction

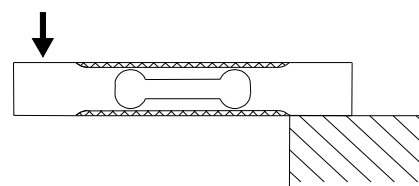

配线图/ Wiring Code

