


HVC-X05

HVC-X05

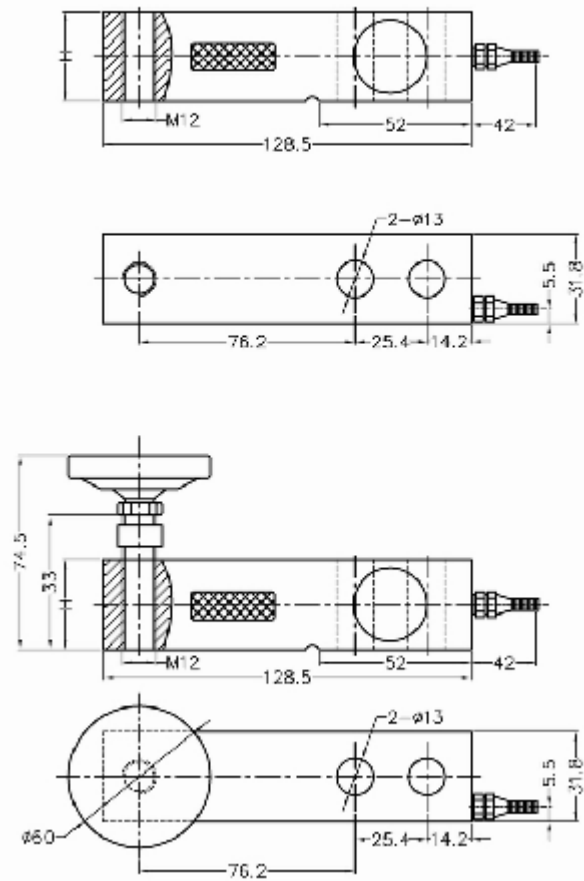

额定载荷(t) Rated Load	H
0.1~0.5	15.9
0.75,1	19.1
2	25.4

额定载荷(t) Rated Load	H
0.1~0.5	15.9
0.75,1	19.1
2	25.4

参数	Specifications	技术指标/Technique
额定容量	Capacity	0.1,0.2,0.3,0.5,0.75,1,1.5,2tx
输出灵敏度	Rated output	2.0±0.003mV/V
零点输出	Zero balance	±1% F.S.
非线性	Non-linearity	0.02%F.S.
滞后	Hysteresis	0.02%F.S.
重复性	Repeatability	0.02%F.S.
蠕变（30min）	Creep(30min)	0.02%F.S.
温度灵敏度漂移	Temp.effect on output	0.02%F.S./10℃
零点温度漂移	Temp.effect on zero	0.02%F.S./10℃
输入电阻	Input impedance	400±10Ω
输出电阻	Output impedance	350±3Ω
绝缘电阻	Insulation	≥5000MΩ/100VDC
激励电压	Recommended excitation	5V
最大激励电压	Maximum excitation	15V
温度补偿范围	Compensated temp range	-10~40℃
工作温度范围	Operation temp range	-20~60℃
安全超载	Safe overload	150%F.S.
极限超载	Ultimate overload	200%F.S.
电缆线尺寸	Cable size	Φ5×3000mm
单件重量	Weight approx.	0.5kg
材料	Material	Alloy Steel（合金钢）
防护等级	IP Class	IP66