


安装尺寸/Mounting Dimension

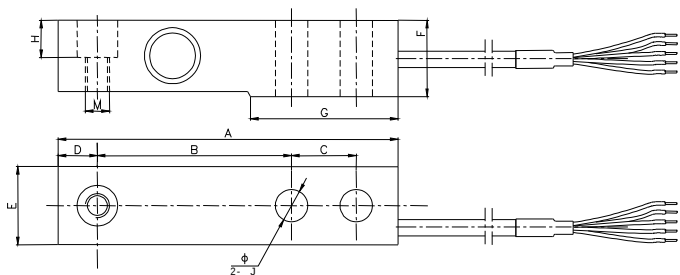

Cap (t)	A	B	C	D	E	F	G	H	J	M
0.55,1.1,1.76	133.4	76.2	25.4	15.4	30.7	30.2	57.7	14.2	20.6	M12
2.2	171.5	95.3	38.1	19.1	36.8	36.5	76.2	17	30.2	M20
4.4	171.5	95.3	38.1	19.1	36.8	42.9	76.2	20.1	30.2	M20


特点与用途/Features & Applications

- 不锈钢材质，稳定性强
- 适用于各种环境，IP68
- 主要用于包装秤，料斗秤，各种工业称重系统等

参数	Specifications	技术指标/Technique
额定容量	Capacity	0.55,1.1,1.76,2.2,4.4t
精度等级	Accuracy class	C3
输出灵敏度	Rated output	1.94±0.1%mV/V
零点输出	Zero balance	±2%F.S.
非线性	Non-linearity	0.017%F.S.
滞后	Hysteresis	0.017%F.S.
重复性	Repeatability	0.017%F.S.
蠕变（30min）	Creep(30min)	0.0166%F.S.
温度灵敏度漂移	Temp.effect on output	0.014%F.S./10℃
零点温度漂移	Temp.effect on zero	0.0125%F.S./10℃
输入电阻	Input impedance	390±3Ω
输出电阻	Output impedance	350±5Ω
绝缘电阻	Insulation	≥5000MΩ/100VDC
激励电压	Recommended excitation	5V
最大激励电压	Maximum excitation	15V
温度补偿范围	Compensated temp range	-10~40℃
工作温度范围	Operation temp range	-30~70℃
安全超载	Safe overload	150%F.S.
极限超载	Ultimate overload	300%F.S.
电缆线尺寸	Cable size	Φ5.4×1500mm
单件重量	Weight approx.	0.9kg (0.55~1.76t) 1.6kg(2.2t)2.2kg(4.4t)
材料	Material	Stainless Steel (不锈钢)
防护等级	IP Class	IP68

- Made of Stainless Steel , Strong stability
- Used in various automated stamping applications,IP68 protection
- Mainly used for packing scales,hopper scale and industrial measuring system

受力方式/Load Direction



配线图/ Wiring Code

