



安装尺寸/Mounting Dimension

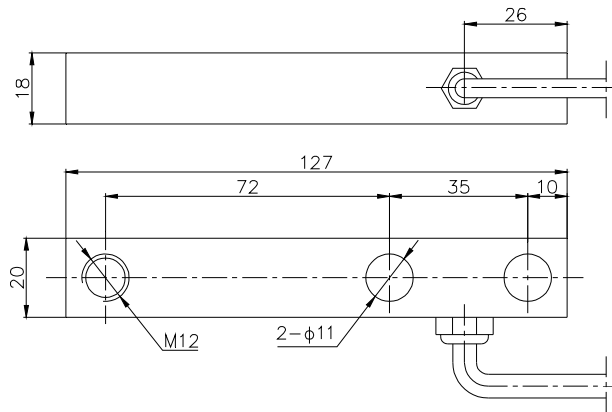


特点与用途/Features & Applications

- 稳定性强
 - 适用于各种环境，IP68
 - 主要用于地上衡，包装秤，各种工业称重系统等
- Strong stability
 - Used in various automated stamping applications,IP68 protection
 - Mainly used for packing scales,hopper scale and industrial measuring system

受力方式/Load Direction

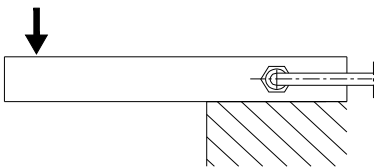

配线图/ Wiring Code

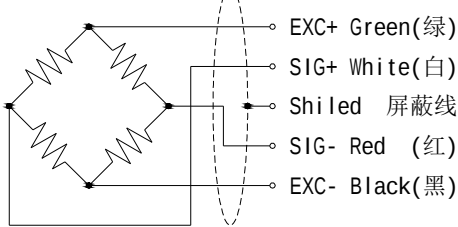

参数	Specifications	技术指标/Technique
额定容量	Capacity	100, 150,200 kg
精度等级	Accuracy class	C3
输出灵敏度	Rated output	1.9±10% mV/V
零点输出	Zero balance	±2%F.S.
非线性	Non-linearity	0.02%F.S.
滞后	Hysteresis	0.02%F.S.
重复性	Repeatability	0.03%F.S.
蠕变（30min）	Creep(30min)	0.02%F.S.
温度灵敏度漂移	Temp.effect on output	0.02%F.S./10℃
零点温度漂移	Temp.effect on zero	0.02%F.S./10℃
输入电阻	Input impedance	390±10 Ω
输出电阻	Output impedance	350±5 Ω
绝缘电阻	Insulation	≥5000M Ω /100VDC
激励电压	Recommended excitation	10V
最大激励电压	Maximum excitation	15V
温度补偿范围	Compensated temp range	-10~60℃
工作温度范围	Operation temp range	-20~80℃
安全超载	Safe overload	150%F.S.
极限超载	Ultimate overload	300%F.S.
电缆线尺寸	Cable size	Φ5×1500mm
单件重量	Weight approx.	0.3kg
材料	Material	合金钢
防护等级	IP Class	IP66