


特点与用途/Features & Applications

- 丨 不锈钢材料，长期稳定性好
- 丨 可取代现有转轴，便于安装
- 丨 适用于港口，码头货物计量及启闭机，起重设备的安全检测
- 丨 尺寸形状可定制
- 丨 Made of stainless steel,long term stabil
- 丨 Used for ports,terminals and cargo crar as well as hoist,lifting equipment and safet testing applications
- 丨 Shape and size customized

参数	Specifications	技术指标/Technique
额定容量	Capacity	50kN
输出灵敏度	Rated output	1.0±5% mV/V
零点输出	Zero balance	±2% F.S.
非线性	Non-linearity	0.5% F.S.
滞后	Hysteresis	0.2% F.S.
重复性	Repeatability	0.2% F.S.
蠕变（30min）	Creep(30min)	0.05% F.S.
温度灵敏度漂移	Temp.effect on output	0.05% F.S./10℃
零点温度漂移	Temp.effect on zero	0.05% F.S./10℃
输入电阻	Input impedance	750±30Ω
输出电阻	Output impedance	700±10Ω
绝缘电阻	Insulation	≥2000MΩ/50VDC
激励电压	Recommended excitation	10V
最大激励电压	Maximum excitation	15V
温度补偿范围	Compensated temp range	-10~60℃
工作温度范围	Operation temp range	-20~80℃
安全超载	Safe overload	150% F.S.
极限超载	Ultimate overload	300% F.S.
电缆线尺寸	Cable size	M12×1-4P
材料	Material	Stainless Steel（不锈钢）
单件重量	Weight approx.	1.8kg
防护等级	IP Class	IP67

受力方式/Load Direction

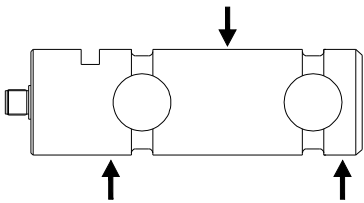

配线图/ Wiring Code

